

OFL-15A Optical Fiber Polisher



Features:


- Inherit easy operation, high performance and high reliability of the conventional OFL-15 polisher, and progress productivity.
- Capability of twice more pressure enables mass production of up to 24 pcs ferrules simultaneously.
- Polishing technique, polishing jigs or consumables of the conventional OFL-15 polisher are compatible with OFL-15A.
- Large size touch panel enables easy programming of several kinds of polishing conditions (up to 15 kinds of conditions x 5 steps)
- Polishing conditions stored in memory prevent mistake of operation, and enable easy shift of products in production.

Features and Specifications

Comparison between OFL-15A and the conventional OFL-15

Model	Number of simultaneously polishing ferrules	Applicable polishing load	Applicable polishing connectors	Applicable polishing style
Conventional OFL-15	up to 16 pcs	300 to 2500 gf	SC, Simplified SC, FC, LC, MU, Simplified MU, E2000, ST, MT-RJ, MT, Others	UPC, Angle-PC, Angle-Flat, Flat, Others
OFL-15A	up to 32 pcs	300 to 7000 gf	SC, Simplified SC, FC, LC, MU, Simplified MU, E2000, ST, MT-RJ, MT, Others	UPC, Angle-PC, Angle-Flat, Flat, Others

- Number of simultaneously polishing ferrules is increased up to 32 pcs, to progress productivity.
- One touch setting mechanism enables quick and secure attachment of ferrules to jig, and yields high productivity.
- Polishing films for ultra-non-scratch performance with high productivity are also available.

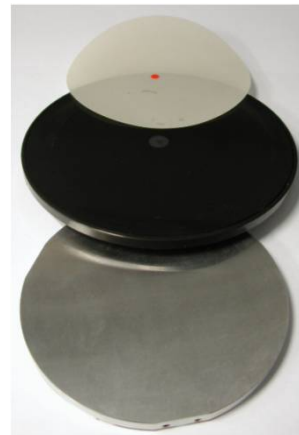

WORLDWIDE SUBSIDIARIES AND SALES OFFICES:

North America

Atlanta, Georgia
 Tel: +1-770-279-6602
 Fax: +1-770-279-8839
sales@sg-usa.com

Europe

Frankfurt, Germany
 Tel: +49-6102-297-701
 Fax: +49-6102-297-750
info@sg-euro.de

Asia

Matsudo, Japan
 Tel: +81-47-388-6111
 Fax: +81-47-388-4477
sales.div@seikoh-giken.co.jp

China

Hangzhou, PROC
 Tel: +86-571-8777-4098
 Fax: +86-571-8777-4099
k.yamazaki@sg-h.cn